


Wire Rope Sling - 3 and 4 legs

Product information

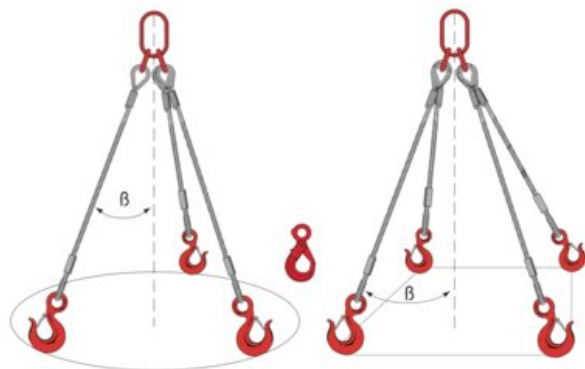

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

WLL table is valid only if the load is equally allocated on the legs

Marking: According to standard

Standard: EN 13414-1

Safety factor: 5:1

Part Code

**WLL
ton**

1609

1

1609

2.1

1609

3

1609

4.5

1609

5.6

1609

7

1609

9

1609

11

1609

13

1609

15

1609

19

1609

28

1609

31.5

1609

35.5

1609

40